





◎ 造精品工程 · 朔超力成品牌  
Build The State-of-the-arts Projects And  
Make The Brand Image Of The Chaolicheng



◇ Company panorama  
◇ 公司全景

## B 公司简介 Brief Introduction

Hangzhou Chaolicheng Rigging Co., Ltd is located in Xianghu Tourism Zone, Xiaoshan District, Hangzhou City. 20km off Xiaoshan International Airport, with Hu-Hang-Yong Expressway, Shanghai, and Ningbo near at hand, where it enjoys the convenient traffic transportation.

Riggings of our company are based on advanced technology and standard both form home and abroad. All products are made by qualified materials. Main products of our company are Flat Webbing Sling, Round Sling, Ratchet Tie Down, Tow Belt, Safety Belt, ect. Additionally, custom-made service is available as well.

Chaolicheng Rigging has a group of team specializing in technology and management, advanced inspection equipment and quality assurance system to ensure product's safety and reliability.

Our principle: To exist by quality, to develop by management, to win clients by credit.

What you demand is we try our best to do, and what you require is we deserve to do.

杭州超力成索具有限公司座落在杭州萧山湘湖旅游度假区、闻堰工业园区内。距杭州萧山国际机场20公里，紧邻沪杭甬高速，与上海、宁波近在咫尺。交通十分便利。

公司生产的各品种索具带采用国内外先进技术和标准，选用优质原料，专业生产起重吊带、圆套带、拖带、牵引带、安全带、捆绑带（拉紧器带）等系列，产品一应俱全。并可根据客户的特殊要求定制生产。

公司拥有一批优秀的技术和管理团队，并拥有先进的检测设备和质量保证体系。充分保证产品的安全及可靠性。

企业宗旨：质量求生存，管理促发展，诚信赢客户。  
您的需求是我们努力做的，您的要求是我们应该做的。



◎ Innovation, Speeding Along And Going Ahead  
Ceaselessly...  
创新·飞跃·永无止境……

## Products Contents 产品目录

	CLC-01 Flat webbing sling with capacity stripes 扁平吊带 (欧标)	07
	CLC-02 Round sling ring 圆套 (欧标)	08
	CLC-03 Endless webbing sling 圆吊带	09
	CLC-04 Webbing strap 带料	10
	CLC-05 Webbing Sling - American Standard (ASME/ANSI B30.9) 扁平吊带 (美标)	11
	CLC-06 Round Sling - American Standard (ASME/ANSI B30.9) 圆套吊带 (美标)	12
	CLC-07 Flat Webbing Sling - Australian Standard 澳标吊带	13
	CLC-08 Round sling eye-shaped 圆套(吊眼型)	14
	CLC-09 Ratchet Straps 捆绑器	15-23
	CLC-10 Towing Belts 拖车带	24
	CLC-11 Webbing Sling Assembly 吊装带成套索具	25
	CLC-12 Ratchet buckles/Cam buckle/S hook 手拉器/铝扣/S钩	27
	CLC-13 Double J hooks 线钩	29
	CLC-14 Flat Hooks 板钩	30
	CLC-15 Other Metal Parts 其它五金件	31
	CLC-16 Safety Harness 全身穿安全带	33
	CLC-17 Safety Belt 单腰穿安全带	34


Excellent Quality And Ever-existing Victory  
卓越品质·长存常胜

## Inspection Equipment 检测设备

Striving for first class and perfection. Cooperating to create first-class brand with the best products and services. Improving continuously to meet the needs of customers and surpassing their expectations.  
争创一流,超越期望,团队合作,以一流的品质、一流的服务、创一流的品牌,持续改进,不断满足顾客及所有相关方面的要求并力争超越他们的期望。



◇ Product examination 产品检测

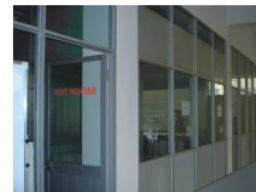

◇ Test room  
测试间



◇ Product examination  
产品检测



◇ Test certificate  
测试证书

## Product Image 产品图例



### HOW TO USE SLINGS









- Never use slings with damages or defects.
- Use slings with clear identifications.
- Check working Load Limit, length and working position.
- Never use slings with knots.
- Never use slings on sharp edges without correct protection.
- Use the correct mode factor and check lifting angle.
- Trapping the sling when lowering the load should be avoided.
- The temperature should be between -40°C and 100°C.
- Stitching should not be placed over hooks or others lifting devices.
- Sling should be stored in dry and clear conditions. Away from heat sources, direct sunlight and UV rays.
- In case of chemical environment, please check with the manufacturer.
- Elongation rate < 3% at working load and < 10% at breaking load.

### 吊带产品特点

- 吊带在吊装使用过程中有减震、不腐蚀、不导电，且在易燃易爆环境下无火星等特点；
- 其截面形状是随吊件的表面形状变化的，而且其本身十分柔软易曲，工作中会紧贴或卷缠在吊件周围，而不会损坏吊件，同时也减少反弹伤人的可能性；
- 在吊装过程中应避免受到锐利器具的割伤，在起吊有锋利的角、边或粗糙表面的货物时，可采用吊带外层加带皮或聚脂保护的方式对吊带加以保护，以延长吊带的使用寿命；
- 吊装作业中，禁止吊带打结或用打结的方法来连接。应采用正确的吊带专用连接件连接；
- 吊带体设有独特标签，并使用国际标准化色来区分承载吨位，即使吊带破损也易于辨认；
- 可根据用户的要求制作安全系数4-8倍的各种吊带产品；
- 吊带的弹性伸长较小，工作载荷上<3%，断裂载荷下<10%；
- 工作温度为-40℃-100℃。



## Webbing Sling 吊带

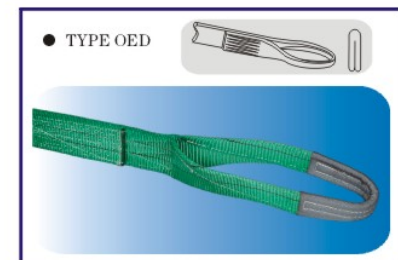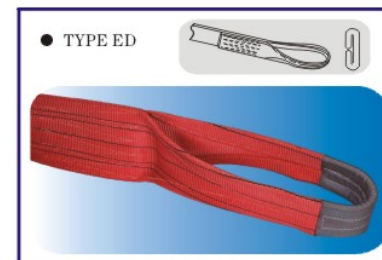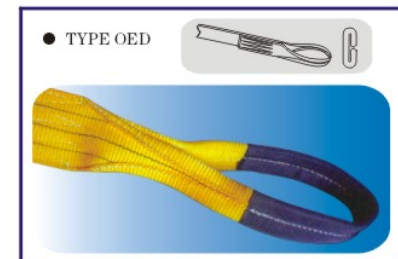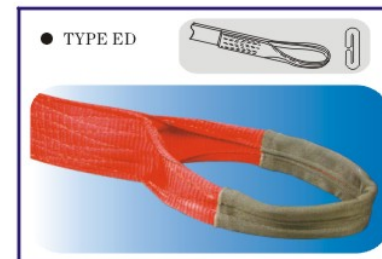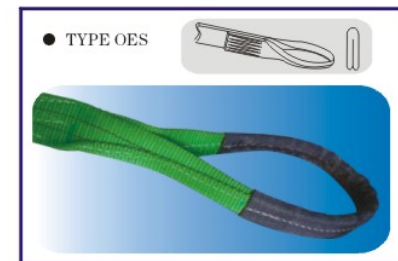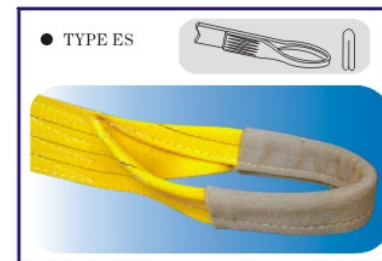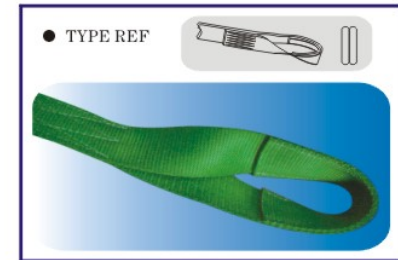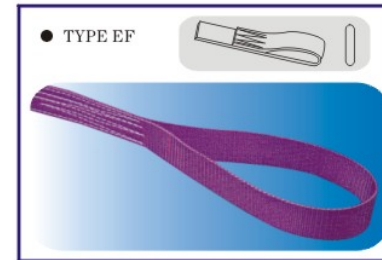

# CLC-01 Flat Webbing Sling With Capacity Stripes 扁平吊装带 (欧标)



- 100% high tenacity polyester
- single ply or double ply
- with reinforced lifting eyes
- low elongation
- each stripe is equal to 1 ton capacity
- length available: 1m to 20m
- safety factor available: 5:1 6:1 7:1 8:1
- according to EN 1492-1:2000

- 原材料: 100%高强度涤纶丝
- 单层吊带或双层吊带
- 加强吊眼
- 低延伸率
- 每条黑线表示工作拉力1t
- 产品长度: 1m-20m
- 安全倍数: 5:1 6:1 7:1 8:1
- 生产标准: EN1492-1:2000



Webbing width (mm) 带宽 (mm)	Colour coded according to standard 色号标准	Working load limit with 1 webbing sling 一根吊带承载重量						Working load limit with 2 webbing sling 二根吊带承载重量			
		Straight lift 垂直吊升	Choked lift 栓结吊升	β			Straight lift up to 45° 垂直吊升 45°	Choked lift up to 45° 栓结吊升 45°	Straight lift up to 45-60° 垂直吊升 45-60°	Choked lift up to 45-60° 栓结吊升 45-60°	
				0-7°	7-45°	45-60°					
25/30/50	WLL 1T	1.000	0.800	2.000	1.400	1.000	1.400	1.120	1.000	800	
50/60	WLL 2T	2.000	1.600	4.000	2.800	2.000	2.800	2.240	2.000	1.600	
75/90	WLL 3T	3.000	2.400	6.000	4.200	3.000	4.200	3.360	3.000	2.400	
100/120	WLL 4T	4.000	3.200	8.000	5.600	4.000	5.600	4.480	4.000	3.200	
125/150	WLL 5T	5.000	4.000	10.000	7.000	5.000	7.000	5.600	5.000	4.000	
150/180	WLL 6T	6.000	4.800	12.000	8.400	6.000	8.400	6.720	6.000	4.800	
200/240	WLL 8T	8.000	6.400	16.000	11.200	8.000	11.200	8.960	8.000	6.400	
250/300	WLL 10T	10.000	8.000	20.000	14.000	10.000	14.000	11.200	10.000	8.000	
300	WLL 12T	12.000	9.600	24.000	16.800	12.000	16.800	13.440	12.000	9.600	
300	WLL 20T	20.000	16.000	40.000	28.000	20.000	28.000	22.400	20.000	16.000	

# CLC-02 Round Sling Ring 圆套 (欧标)



- 100% high tenacity polyester of out sleeve and inner core
- with two ply woven heavy duty outer sleeve
- low elongation
- each stripe is equal to 1 ton capacity, more than 12T no any black stripe
- effective working length available: 1m to 20m
- safety factor available: 5:1 6:1 7:1 8:1
- according to EN 1492-2:2000

- 原材料: 100%高强度涤纶丝 (外套和内芯)
- 双层编织外套
- 低延伸率
- 每条黑线表示工作拉力1T, 12T以上无黑线表述。
- 产品工作长度: 1m-20m
- 安全倍数: 5:1 6:1 7:1 8:1
- 生产标准: EN1492-2:2000




Colour 颜色	Colour coded according to standard 色号标准	Working load limit with 1 webbing sling 一根吊带承载重量						Working load limit with 2 webbing sling 二根吊带承载重量				
		Straight lift 垂直吊升	Choked lift 栓结吊升	β			Straight lift up to 45° 垂直吊升 45°	Choked lift up to 45° 栓结吊升 45°	Straight lift up to 45-60° 垂直吊升 45-60°	Choked lift up to 45-60° 栓结吊升 45-60°		
				0-7°	7-45°	45-60°						
Violet/紫色	WLL 1T	1.000	0.800	2.000	1.400	1.000	700	500	1.400	1.120	1.000	800
Green/绿色	WLL 2T	2.000	1.600	4.000	2.800	2.000	1.400	1.000	2.800	2.240	2.000	1.600
Yellow/黄色	WLL 3T	3.000	2.400	6.000	4.200	3.000	2.100	1.500	4.200	3.360	3.000	2.400
Grey/灰色	WLL 4T	4.000	3.200	8.000	5.600	4.000	2.800	2.000	5.600	4.480	4.000	3.200
Red/红色	WLL 5T	5.000	4.000	10.000	7.000	5.000	3.500	2.500	7.000	5.600	5.000	4.000
Brown/棕色	WLL 6T	6.000	4.800	12.000	8.400	6.000	4.200	3.000	8.400	6.720	6.000	4.800
Blue/蓝色	WLL 8T	8.000	6.400	16.000	11.200	8.000	5.600	4.000	11.200	8.960	8.000	6.400
Orange/橙色	WLL 10T	10.000	8.000	20.000	14.000	10.000	7.000	5.000	14.000	11.200	10.000	8.000
Orange/橙色	WLL 12T	12.000	9.600	24.000	16.800	12.000	8.400	6.000	16.800	13.440	12.000	9.600
Orange/橙色	WLL 15T	15.000	12.000	30.000	21.000	15.000	10.500	7.500	21.000	16.800	15.000	12.000
Orange/橙色	WLL 18T	20.000	16.000	40.000	28.000	20.000	14.000	10.000	28.000	22.400	20.000	16.000
Orange/橙色	WLL 20T	25.000	20.000	50.000	35.000	25.000	17.500	12.500	35.000	28.000	25.000	20.000
Orange/橙色	WLL 30T	30.000	24.000	60.000	42.000	30.000	21.000	15.000	42.000	33.600	30.000	24.000
Orange/橙色	WLL 50T	50.000	40.000	100.000	70.000	50.000	35.000	25.000	70.000	56.000	50.000	40.000
Orange/橙色	WLL 60T	60.000	48.000	120.000	84.000	60.000	42.000	30.000	84.000	67.200	60.000	48.000

# CLC-03 Endless Webbing Sling 圆圈带



- 100% high tenacity polyester
- single ply
- low elongation
- length available: 1m to 20m
- according EN 1492-1:2000
- safety factor available: 5: 1    6: 1    7: 1    8: 1

- 原材料: 100%高强度涤纶丝
- 单层圆圈带
- 低延伸率
- 产品长度: 1m-20m
- 生产标准: EN1492-1:2000
- 安全倍数: 5: 1    6: 1    7: 1    8: 1

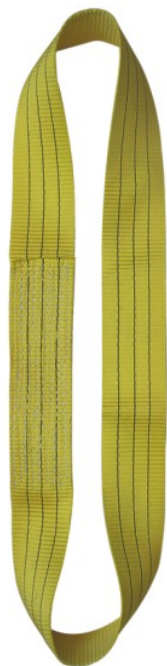

Webbing width(mm) single ply 带宽 (mm) 单层	Colour coded according to standard 色号标准	Working load limit with 1 webbing sling 一根吊带载重限度						Working load limit with 2 webbing sling 二根吊带载重限度				
		Straight lift 垂直吊升	Choked lift 栓结吊升	β				Straight lift up to 45° 垂直吊升栓结吊升 45°	Choked lift up to 45° 垂直吊升栓结吊升 45°	Straight lift 45-60° 垂直吊升栓结吊升 45-60°	Choked lift 45-60° 垂直吊升栓结吊升 45-60°	
				0-7°	7-45°	45-60°	Up to 45°					45-60°
		1.0	0.8	2.0	1.4	1.0	0.7	0.5	1.4	1.12	1.0	0.8
25/30	WLL 1T	1,000	800	2,000	1,400	1,000	700	500	1,400	1,120	1,000	800
50/60	WLL 2T	2,000	1,600	4,000	2,800	2,000	1,400	1,000	2,800	2,240	2,000	1,600
75/90	WLL 3T	3,000	2,400	6,000	4,200	3,000	2,100	1,500	4,200	3,360	3,000	2,400
100/120	WLL 4T	4,000	3,200	8,000	5,600	4,000	2,800	2,000	5,600	4,480	4,000	3,200
125/150	WLL 5T	5,000	4,000	10,000	7,000	5,000	3,500	2,500	7,000	5,600	5,000	4,000
150/180	WLL 6T	6,000	4,800	12,000	8,400	6,000	4,200	3,000	8,400	6,720	6,000	4,800
200/240	WLL 8T	8,000	6,400	16,000	11,200	8,000	5,600	4,000	11,200	8,960	8,000	6,400
250/300	WLL 10T	10,000	8,000	20,000	14,000	10,000	7,000	5,000	14,000	11,200	10,000	8,000
250/300	WLL 12T	20,000	16,000	40,000	28,000	20,000	14,000	10,000	28,000	22,400	20,000	16,000

# CLC-04 Webbing Strap 带料

◆ 吊带带料 Webbing Strap (for Webbing Sling)









◆ 捆绑带带料 Lashing Strap (for Cargo Lashing)



# CLC-05







## Webbing Sling - American Standard (ASME/ANSI B30.9) 扁平吊装带 (美标)

### ◆ DOUBLE PLY EYE AND EYE WEBBING SLING CLASS 5\*


Item	webbing width(inch)	Vertical	Chocker	Vertical Basket	60° Basket	45° Basket	30° Basket	M,B,S
								
		lbs	lbs	lbs	lbs	lbs	lbs	
WSEE-2-6010	1	2,200	1,760	4,400	3,811	3,111	2,200	11,000
WSEE-2-6015	1-1/2	3,300	2,640	6,600	5,716	4,667	3,300	16,500
WSEE-2-6017	1-3/4	3,800	3,040	7,600	6,582	5,374	3,800	19,000
WSEE-2-6020	2	4,400	3,520	8,800	7,621	6,222	4,400	22,000
WSEE-2-6030	3	6,600	5,280	13,200	11,432	9,333	6,600	33,000
WSEE-2-6040	4	8,200	6,560	16,400	14,203	11,595	8,200	41,000
WSEE-2-6050	5	10,200	8,160	20,400	17,667	14,423	10,200	51,000
WSEE-2-6060	6	12,300	9,840	24,600	21,304	17,393	12,300	61,500

◆ Class 5 means rated loads are based on a stuffer weave construction webbing possessing a minimum certified tensile strength of 6,800 lb/inch width.

### ◆ DOUBLE PLY EYE AND EYE WEBBING SLING CLASS 7\*

Item	webbing width(inch)	Vertical	Chocker	Vertical Basket	60° Basket	45° Basket	30° Basket	M,B,S
								
		lbs	lbs	lbs	lbs	lbs	lbs	
WSEE-2-9010	1	3,100	2,480	6,200	5,370	4,384	3,100	15,500
WSEE-2-9015	1-1/2	4,700	3,760	9,400	8,141	6,646	4,700	23,500
WSEE-2-9017	1-3/4	5,400	4,320	10,800	9,353	7,636	5,400	27,000
WSEE-2-9020	2	6,200	4,960	12,400	10,739	8,767	6,200	31,000
WSEE-2-9030	3	8,800	7,040	17,600	15,242	12,444	8,800	44,000
WSEE-2-9040	4	11,000	8,800	22,000	19,052	15,554	11,000	55,000
WSEE-2-9050	5	13,700	10,960	27,400	23,729	19,372	13,700	68,500
WSEE-2-9060	6	16,500	13,200	33,000	28,578	23,331	16,500	82,500
WSEE-2-9080	8	22,750	18,200	45,500	39,403	32,169	22,750	113,750
WSEE-2-9100	10	28,400	22,720	56,800	49,189	40,158	28,400	142,000



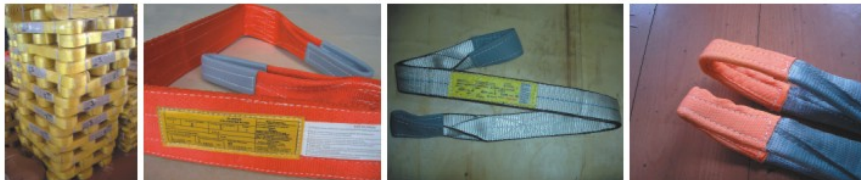



◆ Class 7 means rated loads are based on a stuffer weave construction webbing possessing a minimum certified tensile strength of 9,800 lb/inch width.



# CLC-06

## Round Sling - American Standard (ASME/ANSI B30.9) 圆套吊带 (美标)

### ◆ SYNTHETIC ENDLESS ROUNDSLING

Colour 颜色	Item	Vertical	Chocker	Vertical Basket	60° Basket	45° Basket	30° Basket
							
		lbs	lbs	lbs	lbs	lbs	lbs
Violet/紫色	ENRS-1	2,600	2,100	5,200	4,500	3,700	2,600
Green/绿色	ENRS-2	5,300	4,200	10,600	9,200	7,500	5,300
Yellow/黄色	ENRS-3	8,400	6,700	16,800	14,500	11,900	8,400
Tawney/茶色	ENRS-4	10,600	8,500	21,200	18,400	15,000	10,600
Red/红色	ENRS-5	13,200	10,600	26,400	22,900	18,700	13,200
Brown/棕色	ENRS-6	16,800	13,400	33,600	29,100	23,800	16,800
Blue/蓝色	ENRS-7	21,200	17,000	42,400	36,700	30,000	21,200
Orange/橙色	ENRS-8	25,000	20,000	50,000	43,300	35,400	25,000
Grey/灰色	ENRS-9	31,000	24,800	62,000	53,700	43,800	31,000
Orange/橙色	ENRS-10	40,000	32,000	80,000	69,300	56,600	40,000
Brown/棕色	ENRS-11	53,000	42,400	106,000	91,800	74,900	53,000
Olive green/橄榄绿	ENRS-12	66,000	52,800	132,000	114,300	93,300	66,000
Black/黑色	ENRS-13	90,000	72,000	180,000	155,900	127,300	90,000

Remarks: Eye and eye type roundsling is available upon request

When ordering it is important to make clear whether the length specified is circumference or effective working length.

Safety Factor: 5:1 to ASME/ANSI B.30.9

Warning: Do not exceed rated capacities, ratings must be reduced when slings are used at angles less than 90° from horizontal.



# CLC-07 FLAT WEBBING SLING-AUSTRALIAN STANDARD 澳标吊带

The Range of Quality Hi-Tech Slings for Intensive Use.

WWL: up to 20,000 kg


Safety Factor: 8:1

## 100% Polyester-Fully Colour Coded Type=B Double Ply

Tech Data Code #	B250	B500	B1000	B2000	B3000	B4000	B5000	B6000	B8000	B10000	CS12000	CS15000	CS20000
Rated WLL(kg)	250	500	1000	2000	3000	4000	5000	6000	8000	10000	12,000	16,000	20,000
Web Colour Code													
b Web width(mm)	25	35	50	75	100	140	150	180	240	300	180	240	300
S Web thickness(mm)	4	4	5	7.5	8	8	8	8	9	9	16	18	18
L1 min sling length (mm)	600	700	820	1100	1250	1500	1700	2170	2650	3000	2500	3000	3100
L2 min eye length(mm)	200	400	250	350	400	500	600	800	1000	1200	800	1000	1200

**Note:** Hi-tech and Flat Web Slings(A and B Types) are available in standard lengths, with the minimum lengths indicated. Special long lengths up to 50 metres available on request.

**When Ordering:** 1 Select the WLL. 2 Hi-tech Double Ply or Sing Ply. 3 Plus the length. 4 Then contact your nearest material handling dealer or contact our Customer Service Department.

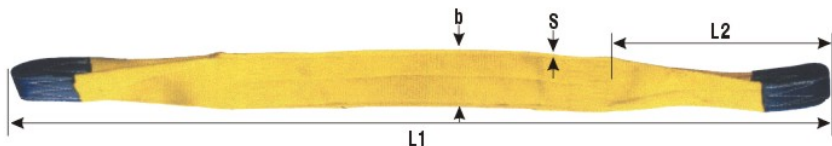

Chao Li Cheng Hi-tech Web Slings are exceptionally versatile. They can be manufactured into any of these styles and combinations.

- General Slings
- Multi-Leg Slings
- Boat Lifting Slings
- Glass Lifting Slings
- One Way Trip Slings
- Securtek Anti-Cutting Slings
- Gang/Multi-Width Slings
- Lift Mat Slings

# CLC-08 Round Sling Eye-shaped 圆套(吊眼型)

- 1、Especially suitable for loading round objects
- 2、The surface of round sling is smooth, does not cause damages to tender objects loaded
- 3、High strength/weight ratio
- 4、effective working length available: 1m to 20m
- 5、safety factor available: 5:1 6:1 7:1 8:1
- 6、according to EN 1492-2:2000

- 1、特别适用于圆形物体的吊装
- 2、吊带带外表面精细，对易损物体不会造成损伤
- 3、强度重量比高
- 4、产品工作长度：1m—20m
- 5、安全倍数：5:1 6:1 7:1 8:1
- 6、生产标准：EN1492-2:2000



Colour 颜色	Colour coded according to standard 色号标准	Working load limit with 1 webbing sling 一根吊带载重限度						Working load limit with 2 webbing sling 二根吊带载重限度				
		Straight lift 垂直吊升	Choked lift 栓结吊升	$\beta$				Straight lift up to 45° 垂直吊升 45°	Choked lift up to 45° 栓结吊升 45°	Straight lift up to 45-60° 垂直吊升 45-60°	Choked lift up to 45-60° 栓结吊升 45-60°	
				0-7°	7-45°	45-60°	Up to 45°					45-60°
		1.0	0.8	2.0	1.4	1.0	0.7	0.6	1.4	1.12	1.0	0.8
Violet/紫色	WLL19	1,000	800	2,000	1,400	1,000	700	600	1,400	1,120	1,000	800
Green/绿色	WLL2T	2,000	1,600	4,000	2,800	2,000	1,400	1,000	2,800	2,240	2,000	1,600
Yellow/黄色	WLL3T	3,000	2,400	6,000	4,200	3,000	2,100	1,500	4,200	3,360	3,000	2,400
Grey/灰色	WLL4T	4,000	3,200	8,000	5,600	4,000	2,800	2,000	5,600	4,480	4,000	3,200
Red/红色	WLL5T	5,000	4,000	10,000	7,000	5,000	3,500	2,500	7,000	5,600	5,000	4,000
Brown/棕色	WLL6T	6,000	4,800	12,000	8,400	6,000	4,200	3,000	8,400	6,720	6,000	4,800
Blue/蓝色	WLL8T	8,000	6,400	16,000	11,200	8,000	5,600	4,000	11,200	8,960	8,000	6,400
Orange/橙色	WLL10T	10,000	8,000	20,000	14,000	10,000	7,000	5,000	14,000	11,200	10,000	8,000
Orange/橙色	WLL12T	12,000	9,600	24,000	16,800	12,000	8,400	6,000	16,800	13,440	12,000	9,600
Orange/橙色	WLL15T	15,000	12,000	30,000	21,000	15,000	10,500	7,500	21,000	16,800	15,000	12,000
Orange/橙色	WLL20T	20,000	16,000	40,000	28,000	20,000	14,000	10,000	28,000	22,400	20,000	16,000
Orange/橙色	WLL25T	25,000	20,000	50,000	35,000	25,000	17,500	12,500	35,000	28,000	25,000	20,000
Orange/橙色	WLL30T	30,000	24,000	60,000	42,000	30,000	21,000	15,000	42,000	33,600	30,000	24,000
Orange/橙色	WLL40T	40,000	32,000	80,000	56,000	40,000	28,000	20,000	56,000	44,800	40,000	32,000
Orange/橙色	WLL60T	60,000	48,000	120,000	84,000	60,000	42,000	30,000	84,000	67,200	60,000	48,000

RATCHET STRAPS  
捆 绑 器



According to EN 12195-2  
生产标准: EN12195-2



超力成捆绑器以方便、省力、安全的特点受到广大用户的亲睐，特别是汽车在高速行驶中能大大提高汽车及货物的安全系数。

超力成捆绑器广泛应用于物流企业、军队运输、火车运输时捆绑货物之用。适用于各个行业、各种车型的货物捆绑。

Chaolicheng, Creating top-grade brand of rigging  
超力成，创造吊索具业一流品牌



Packing Show  
包装展示



Name: Double Blister  
Specification: Width50mm x Length6m-12m  
Packing box volume:55 x35 x33.5cm  
Packing:12 Sets/box

名称: 双透明蛋壳包装  
规格: 宽50mm x 长6m-12m  
纸箱体积: 55 x 35 x 33.5cm  
包装: 12套/箱



Packing Show  
包装展示



Name: 1 pc/set Double Blister  
Specification: 28mm x 1500 kg x 6m (1 pc/set)  
Master Box Volume: 51 x 31 x 32cm  
Packing: 24 sets/box  
名称: 双泡壳单件装  
规格: 28mm x 1500kg x 6m  
纸箱体积: 51 x 31 x 32cm  
包装: 24套/箱



Name: 2 pcs/set Double Blister  
Specification: 1" x 500 kg x 4m (2 pcs/set)  
Master Box Volume: 51 x 31 x 32cm  
Packing: 48 sets/box  
名称: 双泡壳两件装  
规格: 1" x 500 kg x 4m  
纸箱体积: 51 x 31 x 32cm  
包装: 48套/箱



Name: Colored Paper Carton  
Specification: Width50mm x Length6m-12m  
Packing box volume:69 x 26 x 40cm  
Packing:12 Sets/box

名称: 彩色纸盒  
规格: 宽50mm x 长6m-12m  
纸箱体积: 69 x 26 x 40cm  
包装: 12套/箱



Name: Plastic Packing portable type  
Specification: Width2" x Length6m-12m  
Packing box volume:56 x 26 x 25cm  
Packing:10 Sets/box

名称: 塑料袋手提式  
规格: 宽2" x 长6m-12m  
纸箱体积: 56 x 26 x 25cm  
包装: 10套/箱



Name: Shrink  
Specification: Width50mm x Length6m-12m  
Packing box volume:56 x 26 x 25cm  
Packing:10 Sets/box

名称: 收缩膜成套包装  
规格: 宽50mm x 长6m-12m  
纸箱体积: 56 x 26 x 25cm  
包装: 10套/箱



Name: 1 pc/set Plastic Box  
Specification: 28mm x 1500kg x 4.6m (4 pcs/set)  
Master Box Volume:31.5 x 25.5 x 32cm  
Packing: 10 sets/box  
名称: 塑料盒单件装  
规格: 28mm x 1500kg x 4.6m  
纸箱体积: 31.5 x 25.5 x 32cm  
包装: 10套/箱



Name: 1 pc/set Plastic Box  
Specification: 2" x 4000 kg x 9.5m (1 pc/set)  
Master Box Volume:36 x 26 x 39cm  
Packing: 6 sets/box  
名称: 塑料盒单件装  
规格: 2" x 4000 kg x 9.5m  
纸箱体积: 36 x 26 x 39cm  
包装: 6套/箱



Name: 4 pcs/set Plastic Box  
Specification: 1" x 800kg x 4.6m (4 pcs/set)  
Master Box Volume:36 x 26 x 39cm  
Packing: 6 sets/box  
名称: 塑料盒四件装  
规格: 1" x 800kg x 4.6m  
纸箱体积: 36 x 26 x 39cm  
包装: 6套/箱

# CLC-09 Ratchet Straps/捆绑器

According to EN 12195-2 生产标准: EN12195-2



Note: Numbers before T or EG means Breaking Strength, Numbers before A or B means Width of Straps, "1" or "2" means there is only one part or there are two parts of each ratchet tie down, JD or FH means the Type of Hooks

注: T前文字代表破断负荷; A或B前文字代表带料宽度 (mm); 2代表美国定端及长端; JD代表钩子型号; 1代表一段固定端;

## 0.8t, 25A-2-JD Load Capacity (LC) 工作拉力



Tensioning element: pressure ratchet  
Standard length: 6m  
捆绑器系列: 双排钩 S钩  
标准长度: 6.00米



End fittings  
终端附件

## 1t, 25B-2-JD Load Capacity (LC) 工作拉力



Tensioning element: pressure ratchet  
Standard length: 6m  
捆绑器系列: 双排钩  
标准长度: 6.00米



End fittings  
终端附件

## 2t, 35A-2-JD Load Capacity (LC) 工作拉力



Tensioning element: pressure ratchet  
Standard length: 6m  
捆绑器系列: 双排钩  
标准长度: 6.00米



End fittings  
终端附件

## 3t, 35B-2-JD Load Capacity (LC) 工作拉力



Tensioning element: pressure ratchet  
Standard length: 6m  
捆绑器系列: 双排钩  
标准长度: 6.00米



End fittings  
终端附件

## 3t, 50A-2-JD Load Capacity (LC) 工作拉力



Tensioning element: pressure ratchet  
Standard length: 8m  
捆绑器系列: 双排钩 三角环  
标准长度: 8.00米



End fittings  
终端附件

# CLC-09 Ratchet Straps/捆绑器

According to EN 12195-2 生产标准: EN12195-2



Note: Numbers before T or EG means Breaking Strength, Numbers before A or B means Width of Straps, "1" or "2" means there is only one part or there are two parts of each ratchet tie down, JD or FH means the Type of Hooks

注: T前文字代表破断负荷; A或B前文字代表带料宽度 (mm); 2代表美国定端及长端; JD代表钩子型号; 1代表一段固定端;

## 4t, 50B-2-JD Load Capacity (LC) 工作拉力




Tensioning element: pressure ratchet  
Standard length: 8m  
捆绑器系列: 双排钩 U形钩  
标准长度: 8.00米



End fittings  
终端附件

## 5t, 50C-2-JD Load Capacity (LC) 工作拉力

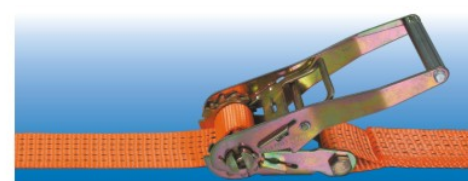

Tensioning element: pressure ratchet  
Standard length: 8m  
捆绑器系列: 双排钩 天钩  
标准长度: 8.00米



End fittings  
终端附件

## 10t, 75A-2-JD Load Capacity (LC) 工作拉力



Tensioning element: pressure ratchet  
Standard length: 8m  
捆绑器系列: 双排钩  
标准长度: 8.00米



End fittings  
终端附件

## 10t, 100A-2-JD Load Capacity (LC) 工作拉力



Tensioning element: pressure ratchet  
Standard length: 8m  
捆绑器系列: 双排钩  
标准长度: 8.00米



End fittings  
终端附件

## 10,000 lbs, 50D-2-FH Load Capacity (LC) 工作拉力



Tensioning element: pressure ratchet  
Standard length: 27'-30'  
捆绑器系列: 双排钩 板钩  
标准长度: 27'-30'



End fittings  
终端附件

# CLC-09 Ratchet Straps/捆绑器


According to EN 12195-2 生产标准: EN12195-2



Note: Numbers before T or KG means Breaking Strength, Numbers before A or B means Width of Straps, "1" or "2" means there is only one part or there are two parts of each ratchet tie down, JD or FH means the Type of Hooks

注: T前文字代表破断负荷; A或B前文字代表带料宽度 (mm); 2代表固定端及长端; JD代表钩子型号; 1代表一段固定端

## 4.54t, 50-2-FH Load Capacity (LC) 工作拉力

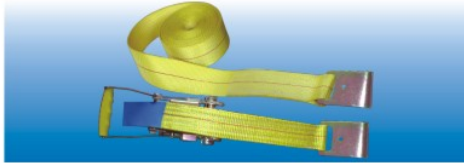

Tensioning element: Flat Hooks  
Standard length: 27'-30'  
捆绑器系列: 板钩  
标准长度: 27'-30'

3333 Lbs  
10000 Lbs

## Ratchet Tie Down Assembly (Complies to AS/NZS 4380)



Tensioning element: pressure ratchet  
Standard length: 8m  
捆绑器系列: 天鹤钩  
标准长度: 8.00米

2500 Kgs  
5000 Kgs

End fittings  
终端附件

## 1.5t, 25A-2-BH Load Capacity (LC) 工作拉力

Tensioning element: S hook  
Standard length: 6m  
捆绑器系列: S形钩  
标准长度: 6.00米

750 Kgs  
1500 Kgs



## 1.5t, 25B-2-BH2 Load Capacity (LC) 工作拉力

Tensioning element: S hook  
Standard length: 6m  
捆绑器系列: S形钩  
标准长度: 6.00米

750 Kgs  
1500 Kgs



## 250kg, 25C-1-CL Load Capacity (LC) 工作拉力

250 Kgs  
25C-1-CL



## 900Kg, 35B-1-CL Load Capacity (LC) 工作拉力

900 Kgs  
35-1-CL



# CLC-09 Ratchet Straps/捆绑器

According to EN 12195-2 生产标准: EN12195-2



Note: Numbers before T or KG means Breaking Strength, Numbers before A or B means Width of Straps, "1" or "2" means there is only one part or there are two parts of each ratchet tie down, JD or FH means the Type of Hooks

注: T前文字代表破断负荷; A或B前文字代表带料宽度 (mm); 2代表固定端及长端; JD代表钩子型号; 1代表一段固定端

## 50C-1 Load Capacity (LC) 工作拉力



1000 Kgs  
50C-1-CL

## 0.8t, 25A-1 Load Capacity (LC) 工作拉力



800 Kgs  
25B-1-PR

## 1.5t, 25B-1 Load Capacity (LC) 工作拉力



1500 Kgs  
25A-1-PR

## 2t, 35A-1 Load Capacity (LC) 工作拉力



2000 Kgs  
35B-1-PR

## 3t, 35B-1 Load Capacity (LC) 工作拉力



3000 Kgs  
35A-1-PR

## 50C-1-PR 50C-1-OB Load Capacity (LC) 工作拉力



2000 Kgs

# CLC-09

## Ratchet Straps/捆绑器

According to EN 12195-2 生产标准: EN12195-2



Note: Numbers before T or KG means Breaking Strength, Numbers before A or B means Width of Straps, "1" or "2" means there is only one part or there are two parts of each ratchet tie down, JD or FH means the Type of Hooks  
注: T前文字代表破断负荷; A或B前文字代表带料宽度(mm); 2代表固牢端及长端; JD代表钩子型号; 1代表一段固牢端;

4t, 50A-1

Load Capacity (LC) 工作拉力



4000 Kgs  
50B-1

5t, 50B-1

Load Capacity (LC) 工作拉力



5000 Kgs  
50A-1

10t, 75-1

Load Capacity (LC) 工作拉力



10000 Kgs  
75-1

TD05SA

TD05SB

TD29A

TD29B



Width 宽度: 25mm  
Length 长度: 8m  
Load Capacity 工作拉力:  
☐ 250kg ☐ 500kg  
Packing 包装: (20/box) 20只/箱



Width 宽度: 25mm  
Length 长度: 6m  
Load Capacity 工作拉力:  
☐ 250kg ☐ 500kg  
Packing 包装: (20/box) 20只/箱

Width 宽度: 25mm  
Length 长度: 6m  
Load Capacity 工作拉力:  
☐ 400kg ☐ 800kg  
Packing 包装: (20/box) 20只/箱

# CLC-10

## Towing Belts 拖车带




- ◆ 100% high tenacity polyester
- ◆ Low elongation
- ◆ Length: Any
- ◆ 原材料: 100%高强度涤纶丝
- ◆ 低延伸率
- ◆ 标准长度: 任意长度

Width 宽度	2"		3"		4"		6"
Breaking strength 破断强度	8000lbs	10000lbs	15000lbs	22000lbs	16000lbs	35000lbs	55000lbs
Length 长度	Any						
Packing 包装	Shrink, Portable Bag, Gift Bag 热缩膜, 手提袋, 礼品袋						



# CLC-11 Webbing Sling Assembly 吊装带成套索具

- ◆ 100% high tenacity polyester
  - ◆ Low elongation
  - ◆ 1-, 2-, 3-, 4-, leg available
  - ◆ Standard length: 1m  
(Any length as you need)
  - ◆ Safety factor: 5:1
  - ◆ According to EN 1492-1:2000
  - ◆ Flat Webbing Sling Assembly or Round Sling Assembly
- ◆ 原材料: 100%高强度涤纶丝配80级索具
  - ◆ 低延伸率
  - ◆ 成套索具: 1条, 2条, 3条, 4条
  - ◆ 标准长度: 1m(可根据客户要求定制)
  - ◆ 安全倍数: 5:1
  - ◆ 生产标准: EN1492-1:2000

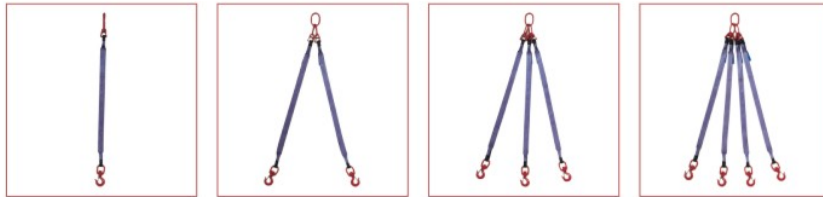

WORKING LOAD LIMITS 工作拉力表

型号		Color of webbing 带子颜色	$\beta=0$ to $45^\circ$	$\beta=45^\circ$ to $60^\circ$
WSC-1		Violet 紫色	1000kg	
		Green 绿色	2000kg	
		Yellow 黄色	3000kg	
		Grey 灰色	4000kg	
		Red 红色	5000kg	
WSC-2		Violet 紫色	1400kg	1000kg
		Green 绿色	2800kg	2000kg
		Yellow 黄色	4200kg	3000kg
		Grey 灰色	5600kg	4000kg
		Red 红色	7000kg	5000kg
WSC-3		Violet 紫色	2100kg	1500kg
		Green 绿色	4200kg	3000kg
		Yellow 黄色	6300kg	4500kg
		Grey 灰色	8400kg	6000kg
		Red 红色	10500kg	7500kg
WSC-4		Violet 紫色	2100kg	1500kg
		Green 绿色	4200kg	3000kg
		Yellow 黄色	6300kg	4500kg
		Grey 灰色	8400kg	6000kg
		Red 红色	10500kg	7500kg

# RIGGING FITTINGS 索具配件



Create Excellence With The Entrepreneur Spirit And  
Build Our Brand Fame With Our Strong Strength  
◎ 敬业创卓越 · 实力铸品牌

# CLC-12 Ratchet Buckles 手拉器



**B25**

Width: 25mm  
Breaking strength: 1500kg  
Packing: 40/box  
Gross weight: 15kg Net weight: 14kg

宽度: 25mm  
破断强度: 1500kg  
包装: 40只/箱  
毛重: 15kg 净重: 14kg

**B38A**

Width: 35mm  
Breaking strength: 3000kg  
Packing: 20/box  
Gross weight: 12kg Net weight: 11kg

宽度: 35mm  
破断强度: 3000kg  
包装: 20只/箱  
毛重: 12kg 净重: 11kg

**B27**

Width: 25mm  
Breaking strength: 1500kg  
Packing: 40/box  
Gross weight: 15kg Net weight: 14kg

宽度: 25mm  
破断强度: 1500kg  
包装: 40只/箱  
毛重: 15kg 净重: 14kg

**B50**

Width: 50mm  
Breaking strength: 5000kg  
Packing: 20/box  
Gross weight: 23kg Net weight: 22kg

宽度: 50mm  
破断强度: 5000kg  
包装: 20只/箱  
毛重: 23kg 净重: 22kg

**B28**

Width: 25mm  
Breaking strength: 1000kg  
Packing: 40/box  
Gross weight: 14kg Net weight: 13kg

宽度: 25mm  
破断强度: 1000kg  
包装: 40只/箱  
毛重: 14kg 净重: 13kg

**B50AL**

Width: 50mm  
Breaking strength: 5000kg  
Packing: 20/box  
Gross weight: 23kg Net weight: 22kg

宽度: 50mm  
破断强度: 5000kg  
包装: 20只/箱  
毛重: 23kg 净重: 22kg

**B29**

Width: 25mm  
Breaking strength: 800kg  
Packing: 100/box  
Gross weight: 23.5kg Net weight: 22.5kg

宽度: 25mm  
破断强度: 800kg  
包装: 100只/箱  
毛重: 23.5kg 净重: 22.5kg

**B51**

Width: 50mm  
Breaking strength: 5000kg  
Packing: 20/box  
Gross weight: 22kg Net weight: 21kg

宽度: 50mm  
破断强度: 5000kg  
包装: 20只/箱  
毛重: 22kg 净重: 21kg

**B38**

Width: 35mm  
Breaking strength: 2000kg  
Packing: 40/box  
Gross weight: 19kg Net weight: 18kg

宽度: 35mm  
破断强度: 2000kg  
包装: 40只/箱  
毛重: 19kg 净重: 18kg

**B75**

Width: 75mm  
Breaking strength: 10000kg  
Packing: 6/box  
Gross weight: 19kg Net weight: 18kg

宽度: 75mm  
破断强度: 10000kg  
包装: 6只/箱  
毛重: 19kg 净重: 18kg

**B39**

Width: 35mm  
Breaking strength: 2000kg  
Packing: 40/box  
Gross weight: 18kg Net weight: 17kg

宽度: 35mm  
破断强度: 2000kg  
包装: 40只/箱  
毛重: 18kg 净重: 17kg

**B100**

Width: 100mm  
Breaking strength: 11000kg  
Packing: 6/box  
Gross weight: 22kg Net weight: 21kg

宽度: 100mm  
破断强度: 11000kg  
包装: 6只/箱  
毛重: 22kg 净重: 21kg

# CLC-12 Ratchet Buckles/Cam Buckle/S Hooks 手拉器/铝扣/S钩



**0B13**

Width: 50mm  
Breaking strength: 860kg  
Packing: 100/box  
Gross weight: 28kg Net weight: 27kg

宽度: 50mm  
破断强度: 860kg  
包装: 100只/箱  
毛重: 28kg 净重: 27kg

**915N**

Width: 45mm  
Breaking strength: 1500kg  
Packing: 80/box  
Gross weight: 28.5kg Net weight: 27.5kg

宽度: 45mm  
破断强度: 1500kg  
包装: 80只/箱  
毛重: 28.5kg 净重: 27.5kg

**914**

Width: 45mm  
Breaking strength: 2250kg  
Packing: 80/box  
Gross weight: 29kg Net weight: 28kg

宽度: 45mm  
破断强度: 2250kg  
包装: 80只/箱  
毛重: 29kg 净重: 28kg

**913**

Width: 45mm  
Breaking strength: 2250kg  
Packing: 40/box  
Gross weight: 21kg Net weight: 20kg

宽度: 45mm  
破断强度: 2250kg  
包装: 40只/箱  
毛重: 21kg 净重: 20kg

**0B11**

Width: 45mm  
Breaking strength: 2250kg  
Packing: 40/box  
Gross weight: 25kg Net weight: 24kg

宽度: 45mm  
破断强度: 2250kg  
包装: 40只/箱  
毛重: 25kg 净重: 24kg

**0B17A**

Width: 45mm  
Breaking strength: 2250kg  
Packing: 40/box  
Gross weight: 25kg Net weight: 24kg

宽度: 45mm  
破断强度: 2250kg  
包装: 40只/箱  
毛重: 25kg 净重: 24kg

## 铝扣

**CB06**

Width: 25mm  
Breaking strength: 300kg  
Packing: 400/box  
Gross weight: 31.5kg Net weight: 30.5kg

宽度: 25mm  
破断强度: 300kg  
包装: 400只/箱  
毛重: 31.5kg 净重: 30.5kg

**CB05**

Width: 25mm  
Breaking strength: 700kg  
Packing: 200/box  
Gross weight: 23kg Net weight: 22kg

宽度: 25mm  
破断强度: 700kg  
包装: 200只/箱  
毛重: 23kg 净重: 22kg

**CB05N**

Width: 25mm  
Breaking strength: 800kg  
Packing: 150/box  
Gross weight: 28kg Net weight: 27kg

宽度: 25mm  
破断强度: 800kg  
包装: 150只/箱  
毛重: 28kg 净重: 27kg

**CB03**

Width: 50mm  
Breaking strength: 1100kg  
Packing: 100/box  
Gross weight: 27kg Net weight: 26kg

宽度: 50mm  
破断强度: 1100kg  
包装: 100只/箱  
毛重: 27kg 净重: 26kg

## S钩

型号 Model	破断强度 Breaking strength (kg)	A (mm)	B (mm)	C (mm)	D (mm)	包装(只/箱) Packing (/box)	毛重 Gross weight (kg)	净重 Net weight (kg)
S50	220	107	25	28	8	250	24	23
S150	700	107	25	28	8	250	24	23
S220	1000	108	25	25	8.5	250	24.5	23.5
S250	1100	120	27	33	9.5	120	18	17
S330	1500	121	28	28	10	120	19	18

# CLC-13 Double J Hooks 线钩



**W520**

Width: 50mm  
Breaking strength: 5000kg  
Packing: 100/box  
Gross weight: 27kg Net weight: 26kg

宽度: 50mm  
破断强度: 5000kg  
包装: 100只/箱  
毛重: 27kg 净重: 26kg

**W309+D19**

Width: 50mm  
Breaking strength: 5000kg  
Packing: 50/box  
Gross weight: 17.5kg Net weight: 16.5kg

宽度: 50mm  
破断强度: 5000kg  
包装: 50只/箱  
毛重: 17.5kg 净重: 16.5kg

**W307**

Width: 25mm  
Breaking strength: 1350kg  
Packing: 400/box  
Gross weight: 23kg Net weight: 22kg

宽度: 25mm  
破断强度: 1350kg  
包装: 400只/箱  
毛重: 23kg 净重: 22kg

**W303**

Width: 25mm  
Breaking strength: 1100kg  
Packing: 400/box  
Gross weight: 18.5kg Net weight: 17.5kg

宽度: 25mm  
破断强度: 1100kg  
包装: 400只/箱  
毛重: 18.5kg 净重: 17.5kg

**W302A**

Width: 45mm  
Breaking strength: 3000kg  
Packing: 100/box  
Gross weight: 18.5kg Net weight: 17.5kg

宽度: 45mm  
破断强度: 3000kg  
包装: 100只/箱  
毛重: 18.5kg 净重: 17.5kg

**W400**

Width: 45mm  
Breaking strength: 5000kg  
Packing: 300/box  
Gross weight: 22kg Net weight: 21kg

宽度: 45mm  
破断强度: 5000kg  
包装: 300只/箱  
毛重: 22kg 净重: 21kg

**W302**

Width: 45mm  
Breaking strength: 3000kg  
Packing: 100/box  
Gross weight: 21.5kg Net weight: 20.5kg

宽度: 45mm  
破断强度: 3000kg  
包装: 100只/箱  
毛重: 21.5kg 净重: 20.5kg

**W504**

Width: 50mm  
Breaking strength: 2250kg  
Packing: 100/box  
Gross weight: 20kg Net weight: 19kg

宽度: 50mm  
破断强度: 2250kg  
包装: 100只/箱  
毛重: 20kg 净重: 19kg

**W304**

Width: 50mm  
Breaking strength: 5000kg  
Packing: 400/box  
Gross weight: 24.5kg Net weight: 23.5kg

宽度: 50mm  
破断强度: 5000kg  
包装: 400只/箱  
毛重: 24.5kg 净重: 23.5kg

**W501**

Width: 50mm  
Breaking strength: 5000kg  
Packing: 100/box  
Gross weight: 29kg Net weight: 28kg

宽度: 50mm  
破断强度: 5000kg  
包装: 100只/箱  
毛重: 29kg 净重: 28kg

**W502**

Width: 50mm  
Breaking strength: 5000kg  
Packing: 70/box  
Gross weight: 26.5kg Net weight: 25.5kg

宽度: 50mm  
破断强度: 5000kg  
包装: 70只/箱  
毛重: 26.5kg 净重: 25.5kg

**W700**

Width: 75mm  
Breaking strength: 10000kg  
Packing: 40/box  
Gross weight: 26kg Net weight: 25kg

宽度: 75mm  
破断强度: 10000kg  
包装: 40只/箱  
毛重: 26kg 净重: 25kg

# CLC-14 Flat Hooks 板钩



**F037**

Width: 25mm  
Breaking strength: 1250kg  
Packing: 1000/box  
Gross weight: 24kg Net weight: 23kg

宽度: 25mm  
破断强度: 1250kg  
包装: 1000只/箱  
毛重: 24kg 净重: 23kg

**F10**

Width: 25mm  
Breaking strength: 1600kg  
Packing: 200/box  
Gross weight: 23kg Net weight: 21kg

宽度: 25mm  
破断强度: 1600kg  
包装: 200只/箱  
毛重: 23kg 净重: 21kg

**F074**

Width: 25mm  
Breaking strength: 350kg  
Packing: 500/box  
Gross weight: 19.5kg Net weight: 18.5kg

宽度: 25mm  
破断强度: 350kg  
包装: 500只/箱  
毛重: 19.5kg 净重: 18.5kg

**F072**

Width: 25mm  
Breaking strength: 1600kg  
Packing: 200/box  
Gross weight: 15kg Net weight: 14kg

宽度: 25mm  
破断强度: 1600kg  
包装: 200只/箱  
毛重: 15kg 净重: 14kg

**F071**

Width: 50mm  
Breaking strength: 3000kg  
Packing: 120/box  
Gross weight: 21.5kg Net weight: 20.5kg

宽度: 50mm  
破断强度: 3000kg  
包装: 120只/箱  
毛重: 21.5kg 净重: 20.5kg

**F021**

Width: 50mm  
Breaking strength: 4500kg  
Packing: 80/box  
Gross weight: 26.5kg Net weight: 25.5kg

宽度: 50mm  
破断强度: 4500kg  
包装: 80只/箱  
毛重: 26.5kg 净重: 25.5kg

**F030**

Width: 75mm  
Breaking strength: 7000kg  
Packing: 60/box  
Gross weight: 25kg Net weight: 24kg

宽度: 75mm  
破断强度: 7000kg  
包装: 60只/箱  
毛重: 25kg 净重: 24kg

**F042**

Width: 100mm  
Breaking strength: 7000kg  
Packing: 60/box  
Gross weight: 28kg Net weight: 27kg

宽度: 100mm  
破断强度: 7000kg  
包装: 60只/箱  
毛重: 28kg 净重: 27kg

# CLC-15 Other Metal Parts 其它五金件



**F051**

Width: 50mm  
Breaking strength: 2700kg  
Packing: 200/box  
Gross weight: 32.5kg Net weight: 31.5kg

宽度: 50mm  
破断强度: 2700kg  
包装: 200只/箱  
毛重: 32.5kg 净重: 31.5kg

**F052**

Width: 50mm  
Breaking strength: 5000kg  
Packing: 100/box  
Gross weight: 28kg Net weight: 27kg

宽度: 50mm  
破断强度: 5000kg  
包装: 100只/箱  
毛重: 28kg 净重: 27kg

**F032**

Width: 50mm  
Breaking strength: 5000kg  
Packing: 100/box  
Gross weight: 32kg Net weight: 31kg

宽度: 50mm  
破断强度: 5000kg  
包装: 100只/箱  
毛重: 32kg 净重: 31kg

**F034**

Width: 35mm  
Breaking strength: 3000kg  
Packing: 100/box  
Gross weight: 17kg Net weight: 16kg

宽度: 35mm  
破断强度: 3000kg  
包装: 100只/箱  
毛重: 17kg 净重: 16kg

**F031A**

Width: 45mm  
Breaking strength: 2200kg  
Packing: 100/box  
Gross weight: 16kg Net weight: 15kg

宽度: 45mm  
破断强度: 2200kg  
包装: 100只/箱  
毛重: 16kg 净重: 15kg

**F031**

Width: 50mm  
Breaking strength: 5000kg  
Packing: 60/box  
Gross weight: 20kg Net weight: 19kg

宽度: 50mm  
破断强度: 5000kg  
包装: 60只/箱  
毛重: 20kg 净重: 19kg

**X01**

Width: 45mm  
Breaking strength: 2700kg  
Packing: 250/box  
Gross weight: 23.5kg Net weight: 22.5kg

宽度: 45mm  
破断强度: 2700kg  
包装: 250只/箱  
毛重: 23.5kg 净重: 22.5kg

**X07**

Breaking strength: 1500kg  
Packing: 500/box  
Gross weight: 24.5kg Net weight: 23.5kg

破断强度: 1500kg  
包装: 500只/箱  
毛重: 24.5kg 净重: 23.5kg

**F019**

Width: 45mm  
Breaking strength: 800kg  
Packing: 400/box  
Gross weight: 17kg Net weight: 16kg

宽度: 45mm  
破断强度: 800kg  
包装: 400只/箱  
毛重: 17kg 净重: 16kg

**F024**

Width: 50mm  
Breaking strength: 3000kg  
Packing: 300/box  
Gross weight: 16kg Net weight: 15kg

宽度: 50mm  
破断强度: 3000kg  
包装: 300只/箱  
毛重: 16kg 净重: 15kg

**F1017**

Breaking strength: 2000kg  
Packing: 300/box  
Gross weight: 29kg Net weight: 28kg

破断强度: 2000kg  
包装: 300只/箱  
毛重: 29kg 净重: 28kg

**F1010**

Breaking strength: 1350kg  
Packing: 300/box  
Gross weight: 16kg Net weight: 15kg

破断强度: 1350kg  
包装: 300只/箱  
毛重: 16kg 净重: 15kg

# CLC-15 Other Metal Parts 其它五金件



**AR22**

Breaking strength: 2500kg  
Packing: 200/box  
Gross weight: 21kg Net weight: 20kg

破断强度: 2500kg  
包装: 200只/箱  
毛重: 21kg 净重: 20kg

**AR12**

Breaking strength: 2500kg  
Packing: 200/box  
Gross weight: 16kg Net weight: 15kg

破断强度: 2500kg  
包装: 200只/箱  
毛重: 16kg 净重: 15kg

**AR13**

Breaking strength: 3000kg  
Packing: 200/box  
Gross weight: 19kg Net weight: 18kg

破断强度: 3000kg  
包装: 200只/箱  
毛重: 19kg 净重: 18kg

**AR14**

Breaking strength: 6000kg  
Packing: 100/box  
Gross weight: 27.5kg Net weight: 26.5kg

破断强度: 6000kg  
包装: 100只/箱  
毛重: 27.5kg 净重: 26.5kg

**TSDR1**

Breaking strength: 8500kg  
Packing: 50/box  
Gross weight: 18.5kg Net weight: 17.5kg

破断强度: 8500kg  
包装: 50只/箱  
毛重: 18.5kg 净重: 17.5kg

**D16**

Breaking strength: 1100kg  
Packing: 500/box  
Gross weight: 15kg Net weight: 14kg

破断强度: 1100kg  
包装: 500只/箱  
毛重: 15kg 净重: 14kg

**F061**

Breaking strength: 5000kg  
Packing: 250/box  
Gross weight: 28kg Net weight: 27kg

破断强度: 5000kg  
包装: 250只/箱  
毛重: 28kg 净重: 27kg

**F013**


Breaking strength: 1100kg  
Packing: 500/box  
Gross weight: 16kg Net weight: 15kg

破断强度: 1100kg  
包装: 500只/箱  
毛重: 16kg 净重: 15kg

**FSDR3 FSDR4**

Model 型号	Breaking strength 破断强度 (kg)	A (mm)	B (mm)	C (mm)	D (mm)	Packing 包装(只/箱)	Gross weight 毛重 (kg)	Net weight 净重 (kg)
TSDR3	7300	70	59.2	16	15.2	50	19.5	18.5
TSDR4	9000	103	73.2	20	17.5	30	23.5	22.5

# CLC-16 Safety Harness 全身安全带

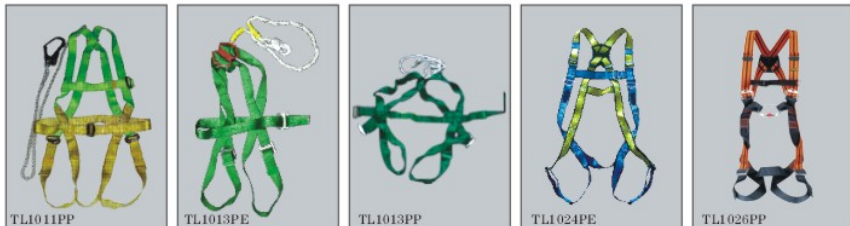





## INSTRUCTION AND MAINTENANCE FOR SAFETY HARNESS

1. Take the harness by the D ring attached to the life rope;
2. Slip on the shoulder straps one after the other, taking care not to twist them. Adjust them by pulling or releasing the slack end, so that the buttock strap is firmly in place under the buttocks, pull one and the other thigh strap through the crotch and latch each strap. Make sure not to cross the straps;
3. Attach the chest strap or the waist strap and adjust its tension to hold the shoulder straps centered on each shoulder;
4. For your safety and comfort in use, the harness has to be correctly adjusted - neither too loose nor too tight.
5. Before each use, a close examination should be made of the straps, rope and fittings to make sure that the harness is in perfect working order;
6. Whenever possible, it is strongly recommended that the harness be assigned to an individual in order to limit the re-adjustments needed when the harness changes hands;
7. Any harness that has withstood a fall or which appears doubtful on visual examination must immediately be withdrawn from service.
8. The harness must be examined at least once a year by a competent person authorized by the manufacturer;
9. Stained belt should be washed with detergent and dried under indirect sun;
10. The equipment should be looked after and kept in a cool dry place free from direct sunlight.

## 全身穿安全带使用说明及注意事项

1. 拎住绳子末端的D形环，提起整条安全带；
2. 先穿肩带，适当调节长度，使臀部带子正好位于臀部下面，再穿腿部带子，系上扣子。注意带子保持平直，无扭转；
3. 系上胸部或腰部的带子，调整松紧，使肩部带子位于肩膀正中；
4. 为了安全和舒适，不要将安全带调得太紧或太松；
5. 每次使用前请检查安全带各个部分，确保其处于最佳工作状态；
6. 建议安全带不要换穿，以免每次重新调节安全带以配合个人使用；
7. 安全带出现磨损、割裂或其他任何可能危及安全的情况时应立即停止使用；
8. 安全带至少每年安检一次；
9. 清洗安全带可使用清洁剂，湿的安全带需自然阴干，避免火或阳光直接烘烤；
10. 每次使用完毕清理干净后存放于阴凉干燥处。

# CLC-17 Safety Belt 单腰安全带

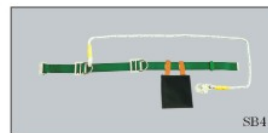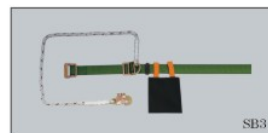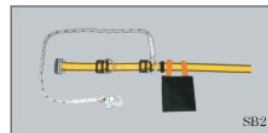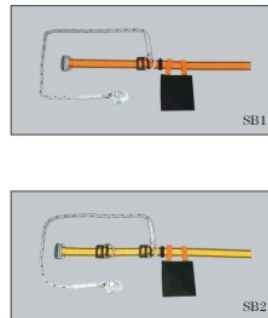

## INSTRUCTION AND MAINTENANCE FOR SAFETY BELT

1. When you fasten the belt, set the buckle correctly and D rings position on rear side of the waist;
2. The hook led to safety belt should be hung as high position as possible;
3. The life rope should not be tied any of sharp angled object;
4. Do not use the life rope to support yourself;
5. Do not use the safety belt which has once been damaged with impact, even if no difference in its out looking is recognized;
6. Any of safety belts, having the following defects, should not be used.
  - A. Insufficient operation of safety cover of the hook;
  - B. Insufficient operation of the buckle's lock;
  - C. Worn out life rope;
  - D. Kinked life rope;
  - E. Worn out threads on the stitched part on the belt;
  - F. Deformed or cracked harm;
7. The following maintenances are recommended.
  - A. Stained belt should be washed with detergent and dried under indirect sun;
  - B. Lubrication to safety harmless, especially its rotating or defacement part, should be done once or twice a month with spindle oil or something alike;
  - C. Do not keep the safety belt with sand.

## 单腰安全带使用说明及注意事项

1. 将带子穿入扣眼，系紧安全带，扣子置于身体前面，D形环置于身后；
2. 挂钩应尽可能挂到高处；
3. 勿将绳子缠绕在有锋利切口的物体上；
4. 勿将整个人悬挂在绳子上；
5. 勿使用已经受损的安全带，即使外表看不出明显的破损处；
6. 安全带若出现以下任何情况之一应立即停止使用：
  - 扣子或钩子使用不灵活；
  - 绳子出现磨损，绳结杂乱；
  - 缝线磨损，断裂；
  - 产品变形。
7. 安全带可使用去污剂清洗，自然阴干；
8. 金属件需每月一至两次涂防锈油；
9. 每次使用完毕请清理干净后存放于阴凉干燥处。

## SAFETY EQUIPMENT 安全带配件

